

SHERWIN WILLIAMS
PORCH AND DECK
PAINT
made to walk on



SHERWIN-WILLIAMS

Porch and Deck Paint

Everybody sees your porch floor and the steps. These are the most conspicuous examples of the care and pride you take in your home. *Of course*, the porch floor is a difficult surface to keep looking well because the service it gets would wear through stone. But there is one thing which will keep it looking well and that is paint—Sherwin-Williams Porch and Deck Paint.

This enamel finish is made especially for porches where there is gritty sand, rain and slush, snow and ice, blustery winds and broiling sun—and the grinding of scuffing feet. It takes the finest kind of paint to deliver satisfactory service on your porch floor. Porch and Deck Paint is made to dry hard and tough so that it can retain its handsome appearance.

Porch and Deck Paint saves you money. Wood floors don't decay when painted every season with Porch and Deck Paint—and it keeps concrete or cement floors from getting shabby and hard to clean.

It costs so little to keep the porch in perfect repair with Porch and Deck Paint—buy a can of it now!

Porch and Deck Paint will cover approximately 250 square feet two coats per gallon.

DIRECTIONS FOR USE

The surface should be clean and perfectly dry. Stir paint thoroughly from bottom of the can, and brush out in thin, even coats with a bristle brush, working the paint well into the pores of the wood.

Do not apply a succeeding coat until the previous one is perfectly dry, proceeding as follows:

WOOD AND CONCRETE

NEW WORK—*First Coat*: Thin with one pint S-W Exolvent or turpentine and one pint pure raw linseed oil to a gallon of paint.

Second Coat: Reduce with about one half-pint of S-W Exolvent or turpentine to a gallon of paint.

Third Coat: Apply paint as it comes from the can. Brush out well.

WOOD AND CONCRETE

OLD WORK—When not too badly worn see that the surface is thoroughly clean. Remove all loose paint and coat all bare spots with material reduced as recommended above for first coat on new work. When dry apply a coat over entire surface, using the material as it comes from the package.

If the surface is badly weatherbeaten and extremely porous, reduce the over-all coat with one pint of S-W Exolvent or turpentine and one pint pure raw linseed oil to the gallon of paint. When dry apply a second coat as it comes from the can.

S-W REXPAR

FOR PORCH CEILINGS, EXTERIOR DOORS, ETC.

The king of all spar varnishes. Designed especially for porch ceilings and other outside uses where an absolutely water and weather resisting varnish is desired, such as outside doors, store fronts, yachts, etc.

4511

SHERWIN-WILLIAMS


Porch and Deck Paint



GRAY No. 69
(Formerly Dark Gray)



GRAY STONE No. 48

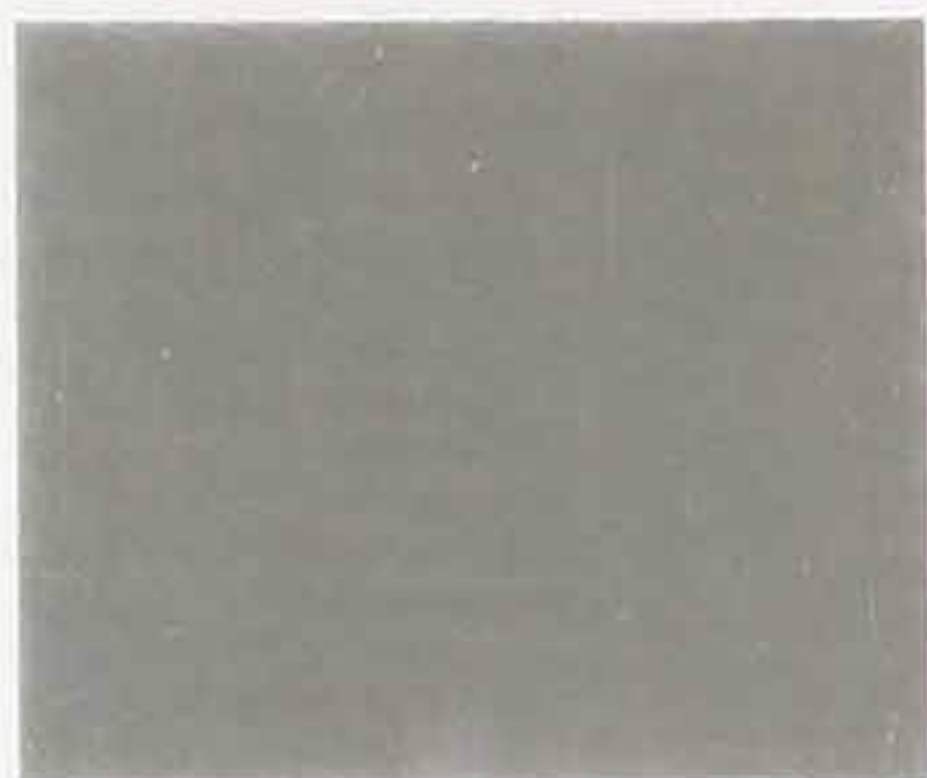

LEAD COLOR No. 53



NEUTRAL BROWN No. 45



DARK SLATE No. 51



TILE RED No. 46

S W P HOUSE PAINT

For Porch Ceilings, Railings, Trim, Etc.

Not For Porch Floors



SWP 354 SEA GREEN



SWP 369 BLUE

Aid to Brighter, Cleaner Homes

SHERWIN-WILLIAMS FLAXOAP



This 100% pure linseed oil soap is ideal for all household cleaning purposes. It leaves varnished floors, woodwork and furniture clean and new in appearance. Sherwin-Williams Flaxoap is a splendid cleanser for the finest rugs or carpets.

FOR BEST RESULTS USE A

SHERWIN-WILLIAMS BRUSH



A finish wears longer and gives better service when applied with the proper Sherwin-Williams Brush.

For best results we recommend an S-W No. 20 Brush.

For small jobs we recommend S-W No. 40 or S-W No. 82 Brush.

THE SHERWIN-WILLIAMS CO.

ADMINISTRATION OFFICES: CLEVELAND, OHIO

SALES OFFICES, FACTORIES AND WAREHOUSES
IN PRINCIPAL CITIES

